

# 2021 Catalog



**RH** | AUTOMOTIVE

**NCT**  
NORTH COUNTRY TIRE  
TIRES SIMPLIFIED

**Edmonton**  
109, 13420 - 149 St.  
Ph: 780.488.8493

1.844.303.8473

**Calgary**  
34, 5381 - 72 Ave. SE  
Ph: 587.333.4020

NORTHCOUNTRYTIRE.CA

**Kelowna**  
140, 2330 Norris Rd.  
Ph: 250.869.8669

ONLINE.NORTHCOUNTRYTIRE.CA

**Langley**  
160, 26988 - 56 Ave.  
Ph: 236.260.1400

**NEOSHIELD**

Our proprietary Neoshield coating uses highly advanced nanotechnology to add a special layer to the exterior of each fastener. This unique coating fuses to the surface of the lug nut and virtually eliminates all porosity. The result is a smoother, shinier and significantly more durable finish that delivers superior protection against rust and corrosion. Our cutting-edge Neoshield design allows our lugs to hold up untarnished in 300+ hours of salt spray testing, which sets RHI as the new quality standard in lug nuts.




- Neoshield coating delivers extreme durability
- Triple nickel plating further protects the life of the lug nut
- Both chrome plated and black chrome finish exceeds 300+ hour salt spray tests
- Cold forged and heat treated for superior hardness and durability
- Two-piece construction offers more usable threads than traditional one-piece
- Antiwear 18 point available in chrome or black
- All RHI lug nuts are made of 1045 carbon steel and heat treated to 10.9 grade hardness

**ANTIWEAR** Lug Nuts with 18-Point Contact



Our AntiWear lug nuts are a unique 18-point acorn lug that delivers 3 times greater contact area versus traditional 6-point acorn lug nuts. Eighteen individual points of contact leads to improved torque distribution during installations and significantly reduces the risk of stripping, chipping or rounding corners of the lugs. The result is a lug nut that provides years of reliability while looking as good as it did the first day it was installed, and requires no special tools.

**SOCKET INTERIOR POINT OF CONTACT**

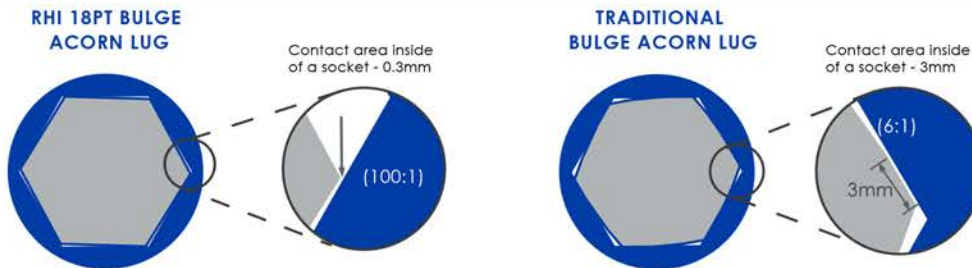



### SPLINE INSTALLATION KITS

SKU	Thread	Type	OD (mm)	No. of Spline	Kit Type	Length (mm)	Length (in)	Finish	Contents
8730K6-Z	1/2"	Open End	20	6	5 Lug/Jeep	22	0.87"	Zinc	23 lugs, 1 key
8734K6-Z	14x1.5	Open End	23	7	6 Lug	25	1.00"	Zinc	24 lugs, 1 key
8734K8-Z	14x1.5	Open End	23	7	8 Lug	25	1.00"	Zinc	32 lugs, 1 key
8735K5-Z	12x1.5	Open End	20	6	5 Lug	22	0.87"	Zinc	20 lugs, 1 key
8735K6-Z	12x1.5	Open End	20	6	6 Lug	22	0.87"	Zinc	24 lugs, 1 key
8736K6-Z	14x2.0	Open End	23	7	6 Lug	25	1.00"	Zinc	24 lugs, 1 key
8736K8-Z	14x2.0	Open End	23	7	8 Lug	22	1.00"	Zinc	32 lugs, 1 key
8737K5-Z	12x1.25	Open End	20	6	5 Lug	22	0.87"	Zinc	20 lugs, 1 key
8737K6-Z	12x1.25	Open End	20	6	6 Lug	22	0.87"	Zinc	24 lugs, 1 key
8738K5-Z	9/16"	Open End	23	7	5 Lug	22	0.87"	Zinc	20 lugs, 1 key
8738K8-Z	9/16"	Open End	23	7	8 Lug	22	0.87"	Zinc	32 lugs, 1 key
8740K6-C	1/2"	Closed End	20	6	5 Lug/Jeep	35	1.38"	Chrome	23 lugs, 1 key
8742K5-C	7/16"	Closed End	23	7	5 Lug	35	1.38"	Chrome	20 lugs, 1 key
8744K6-C	14x1.5	Closed End	23	7	6 Lug	35	1.38"	Chrome	24 lugs, 1 key
8745K5-C	12x1.5	Closed End	20	6	5 Lug	35	1.38"	Chrome	20 lugs, 1 key
8745K6-C	12x1.5	Closed End	20	6	6 Lug	35	1.38"	Chrome	24 lugs, 1 key
8747K5-C	12x1.25	Closed End	20	6	5 Lug	35	1.38"	Chrome	20 lugs, 1 key
8747K6-C	12x1.25	Closed End	20	6	6 Lug	35	1.38"	Chrome	24 lugs, 1 key
8744LK6-C	14x1.5	Closed End (Long)	23	7	6 Lug	50	2.00"	Chrome	24 lugs, 1 key
8744LK8-C	14x1.5	Closed End (Long)	23	7	8 Lug	50	2.00"	Chrome	32 lugs, 1 key
8746LK6-C	14x2.0	Closed End (Long)	23	7	6 Lug	50	2.00"	Chrome	24 lugs, 1 key
8746LK8-C	14x2.0	Closed End (Long)	23	7	8 Lug	50	2.00"	Chrome	32 lugs, 1 key
8748LK5-C	9/16"	Closed End (Long)	23	7	5 Lug	50	2.00"	Chrome	20 lugs, 1 key
8748LK8-C	9/16"	Closed End (Long)	23	7	8 Lug	50	2.00"	Chrome	32 lugs, 1 key
8740K6-B	1/2"	Closed End	20	6	5 Lug/Jeep	35	1.38"	Black Chrome	23 lugs, 1 key
8742K5-B	7/16"	Closed End	23	7	5 Lug	35	1.38"	Black Chrome	20 lugs, 1 key
8744K6-B	14x1.5	Closed End	23	7	6 Lug	35	1.38"	Black Chrome	24 lugs, 1 key
8745K5-B	12x1.5	Closed End	20	6	5 Lug	35	1.38"	Black Chrome	20 lugs, 1 key
8745K6-B	12x1.5	Closed End	20	6	6 Lug	35	1.38"	Black Chrome	24 lugs, 1 key
8747K5-B	12x1.25	Closed End	20	6	5 Lug	35	1.38"	Black Chrome	20 lugs, 1 key
8747K6-B	12x1.25	Closed End	20	6	6 Lug	35	1.38"	Black Chrome	24 lugs, 1 key
8744LK6-B	14x1.5	Closed End (Long)	23	7	6 Lug	50	2.00"	Black Chrome	24 lugs, 1 key
8744LK8-B	14x1.5	Closed End (Long)	23	7	8 Lug	50	2.00"	Black Chrome	32 lugs, 1 key
8746LK6-B	14x2.0	Closed End (Long)	23	7	6 Lug	50	2.00"	Black Chrome	24 lugs, 1 key
8746LK8-B	14x2.0	Closed End (Long)	23	7	8 Lug	50	2.00"	Black Chrome	32 lugs, 1 key
8748LK5-B	9/16"	Closed End (Long)	23	7	5 Lug	50	2.00"	Black Chrome	20 lugs, 1 key



## SPLINE INSTALLATION KITS (cont.)

SKU	Thread	Type	OD (mm)	No. of Spline	Kit Type	Length (mm)	Length (in)	Finish	Contents
8748LK8-B	9/16"	Closed End (Long)	23	7	8 Lug	50	2.00"	Black Chrome	32 lugs, 1 key
8744BK5S-C	14x1.5	Lug Bolt (24mm)	20	6	5 Lug	24	0.95"	Chrome	20 lugs, 1 key
8745BK5S-C	12x1.5	Lug Bolt (24mm)	20	6	5 Lug	24	0.95"	Chrome	20 lugs, 1 key
8743BK5-C	14x1.25	Lug Bolt (27mm)	20	6	5 Lug	27	1.06"	Chrome	20 lugs, 1 key
8744BK5-C	14x1.5	Lug Bolt (27mm)	20	6	5 Lug	27	1.06"	Chrome	20 lugs, 1 key
8745BK5-C	12x1.5	Lug Bolt (27mm)	20	6	5 Lug	27	1.06"	Chrome	20 lugs, 1 key
8747BK5-C	12x1.25	Lug Bolt (27mm)	20	6	5 Lug	27	1.06"	Chrome	20 lugs, 1 key
8744BK5L-C	14x1.5	Lug Bolt (30mm)	20	6	5 Lug	30	1.18"	Chrome	20 lugs, 1 key
8744BK5S-B	14x1.5	Lug Bolt (24mm)	20	6	5 Lug	24	0.95"	Black Chrome	20 lugs, 1 key
8745BK5S-B	12x1.5	Lug Bolt (24mm)	20	6	5 Lug	24	0.95"	Black Chrome	20 lugs, 1 key
8743BK5-B	14x1.25	Lug Bolt (27mm)	20	6	5 Lug	27	1.06"	Black Chrome	20 lugs, 1 key
8744BK5-B	14x1.5	Lug Bolt (27mm)	20	6	5 Lug	27	1.06"	Black Chrome	20 lugs, 1 key
8745BK5-B	12x1.5	Lug Bolt (27mm)	20	6	5 Lug	27	1.06"	Black Chrome	20 lugs, 1 key
8747BK5-B	12x1.25	Lug Bolt (27mm)	20	6	5 Lug	27	1.06"	Black Chrome	20 lugs, 1 key
8744BK5L-B	14x1.5	Lug Bolt (30mm)	20	6	5 Lug	30	1.18"	Black Chrome	20 lugs, 1 key

## SPLINE KITS ET

EACH KIT INCLUDES 24 LUGS & 1 KEY

SKU	Thread	Type	OD (mm)	No. of Spline	Kit Type	Length (mm)	Length (in)	Finish	Shank Dia.	Shank Length
8734K6ET-Z	14x1.5	Open End	23	7	6 Lug	25	1.00"	Zinc	0.236" +/- 0.01	0.61" +/- 0.01
8735K6ET-Z	12x1.5	Open End	20	6	6 Lug	22	0.87"	Zinc	0.236" +/- 0.01	0.61" +/- 0.01
8744K6ET-C	14x1.5	Closed End	23	7	6 Lug	35	1.38"	Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8745K6ET-C	12x1.5	Closed End	20	6	6 Lug	35	1.38"	Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8747K6ET-C	12x1.25	Closed End	20	6	6 Lug	35	1.38"	Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8744K6ET-B	14x1.5	Closed End	23	7	6 Lug	35	1.38"	Black Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8745K6ET-B	12x1.5	Closed End	20	6	6 Lug	35	1.38"	Black Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8747K6ET-B	12x1.25	Closed End	20	6	6 Lug	35	1.38"	Black Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8744LK6ET-C	14x1.5	Closed End (Long)	23	7	6 Lug	50	2.00"	Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8744LK6ET-B	14x1.5	Closed End (Long)	23	7	6 Lug	50	2.00"	Black Chrome	0.236" +/- 0.01	0.61" +/- 0.01



## ACORN KITS - 18 POINT (cont.)

LOCKS USED FOR AL BULGE ACORN STANDARD ACORN LOCKS

SKU	Thread	Type	Kit Type	Length (mm)	Length (in)	Finish	Contents
8445BK5-C	12x1.5	Lug Bolt (27mm)	5 Lug	27	1.06"	Chrome	16 lugs, 4 locks, 1 key
8447BK5-C	12x1.25	Lug Bolt (27mm)	5 Lug	27	1.06"	Chrome	16 lugs, 4 locks, 1 key
8444BK5L-C	14x1.5	Lug Bolt (30mm)	5 Lug	30	1.18"	Chrome	16 lugs, 4 locks, 1 key
8444BK5S-B	14x1.5	Lug Bolt (24mm)	5 Lug	24	0.95"	Black Chrome	16 lugs, 4 locks, 1 key
8445BK5S-B	12x1.5	Lug Bolt (24mm)	5 Lug	24	0.95"	Black Chrome	16 lugs, 4 locks, 1 key
8443BK5-B	14x1.25	Lug Bolt (27mm)	5 Lug	27	1.06"	Black Chrome	16 lugs, 4 locks, 1 key
8444BK5-B	14x1.5	Lug Bolt (27mm)	5 Lug	27	1.06"	Black Chrome	16 lugs, 4 locks, 1 key
8445BK5-B	12x1.5	Lug Bolt (27mm)	5 Lug	27	1.06"	Black Chrome	16 lugs, 4 locks, 1 key
8447BK5-B	12x1.25	Lug Bolt (27mm)	5 Lug	27	1.06"	Black Chrome	16 lugs, 4 locks, 1 key
8444BK5L-B	14x1.5	Lug Bolt (30mm)	5 Lug	30	1.18"	Black Chrome	16 lugs, 4 locks, 1 key

## ACORN KITS - 18 POINT ET

LOCKS USED FOR AL BULGE ACORN STANDARD ACORN LOCKS

EACH KIT INCLUDES 20 LUGS, 4 LOCKS, & 1 KEY

SKU	Thread	Type	Kit Type	Length (mm)	Length (in)	Finish	Shank Dia.	Shank Length
8434K6ET-Z	14x1.5	Open End	6 Lug	22	0.87"	Zinc	0.236" +/- 0.01	0.61" +/- 0.01
8435K6ET-Z	12x1.5	Open End	6 Lug	22	0.87"	Zinc	0.236" +/- 0.01	0.61" +/- 0.01
8444K6ET-C	14x1.5	Closed End	6 Lug	35	1.38"	Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8445K6ET-C	12x1.5	Closed End	6 Lug	35	1.38"	Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8447K6ET-C	12x1.25	Closed End	6 Lug	35	1.38"	Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8444K6ET-B	14x1.5	Closed End	6 Lug	35	1.38"	Black Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8445K6ET-B	12x1.5	Closed End	6 Lug	35	1.38"	Black Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8447K6ET-B	12x1.25	Closed End	6 Lug	35	1.38"	Black Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8444LK6ET-C	14x1.5	Closed End (Long)	6 Lug	48	1.90"	Chrome	0.236" +/- 0.01	0.61" +/- 0.01
8444LK6ET-B	14x1.5	Closed End (Long)	6 Lug	48	1.90"	Black Chrome	0.236" +/- 0.01	0.61" +/- 0.01

### Lug Wrench

- Telescopic performance lug wrench
- Extends up to 21" for maximum leverage
- Patented locking mechanism
- Thin wall dual socket designs
- Pouch included for safe keeping
- Limited lifetime warranty

INCLUDES 2

**DUAL**

SOCKETS

17MM | 3/4"

13/16" | 7/8"



# COLOR CODED APPLICATION CHART



Our premium install kit packaging are color coded to each thread pitch. This allows you to quickly narrow down install kits to thread pitch by looking at the color coded strips on the box.



**7/16-20 RED**



**1/2-20 ORANGE**



**14X1.5 YELLOW**



**14X1.25 BROWN**



**12X1.25 GREEN**



**9/16-18 WHITE**



**14X2.0 GREY**



**12X1.5 BLUE**



**12X1.75 PURPLE**